

Rollin Graffity Plus

Heatset/Commercial Sheetfed

Rollin Graffity Plus




Main Application

Heatset/Commercial Sheetfed

Advantages of the product

- › Top surface for hybrid applications
- › Slightly positive paper feed
- › Very high print quality

Rollin Graffity Plus is available in 3ply, 1,70 - 1,95 mm thickness

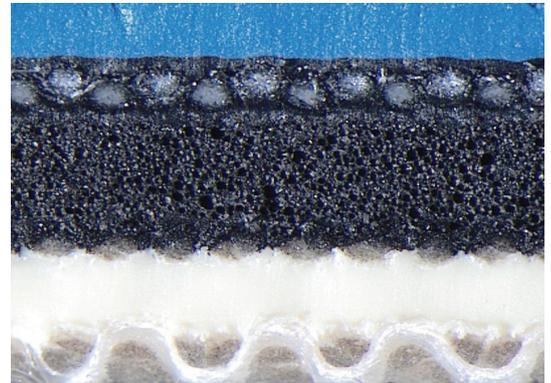

Guiding Value

Standard

Color:	Blue	
Structure:	3 ply	
Surface Roughness Ra*:	0,8 micron	IO LAB TEC 060 - E (internal)
Compressibility @ 0,23 mm*:	2,7 MPa	IO LAB TEC 060 - B (internal)
Thickness +/-0,02 mm*:	1,70 - 1,95 mm	IO LAB TEC 060 - C (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Coated Systems Italy S.p.A
 Strada Provinciale 140,
 26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/disc_en